Combo Cards

Plastic Cards with a Keytag attached. Front on top, back underneath, at 100% scale; the back is mirrored.

Card 85.5 × 54 mm + Keytag 28.5 × 54 mm

Die 85.5 + 28.5 × 54 mm (114 × 54)


Bleed 3 mm · Safe Zone 3 mm

Hole Punch Ø 5 mm On Keytag

FRONT



BACK

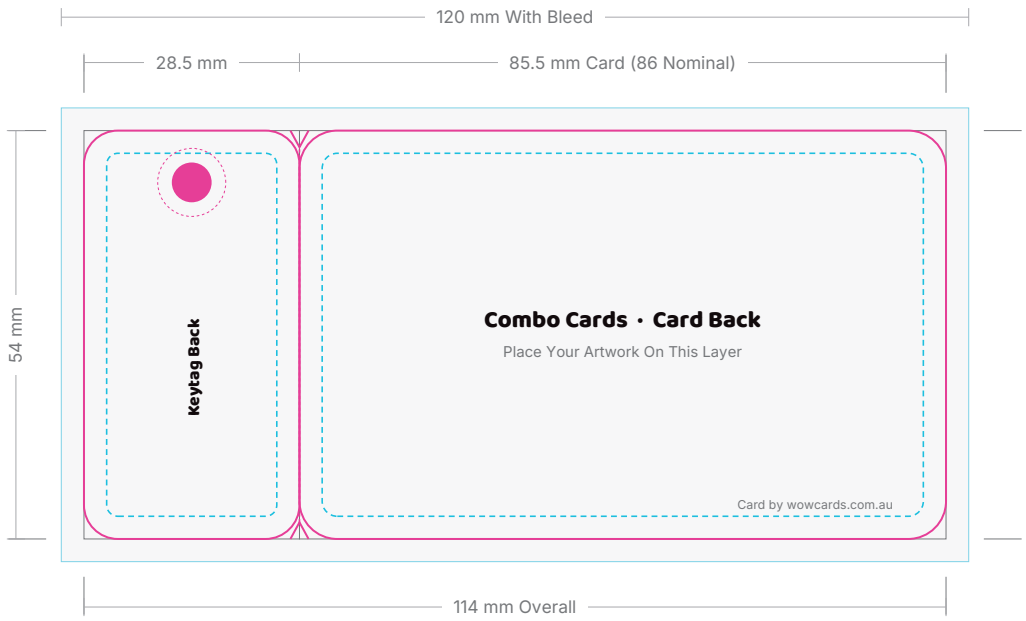

Guide Layers

- Trim
- Die Line C3 M89 Y0 K0
- Bleed 3 mm
- Hole Punch
- Safe Zone 3 mm
- Snap Line

Front on top, back underneath, both at 100%. Pages 2 and 3 are the single-side artboards for print-ready files. Guides do not print.

Combo Cards


Plastic Cards with a Keytag attached. CMYK, 300 dpi. Front shown at 100% scale.

Card 85.5 × 54 mm + Keytag 28.5 × 54 mm

Die 85.5 + 28.5 × 54 mm (114 × 54)

Bleed 3 mm · Safe Zone 3 mm

Hole Punch Ø 5 mm On Keytag

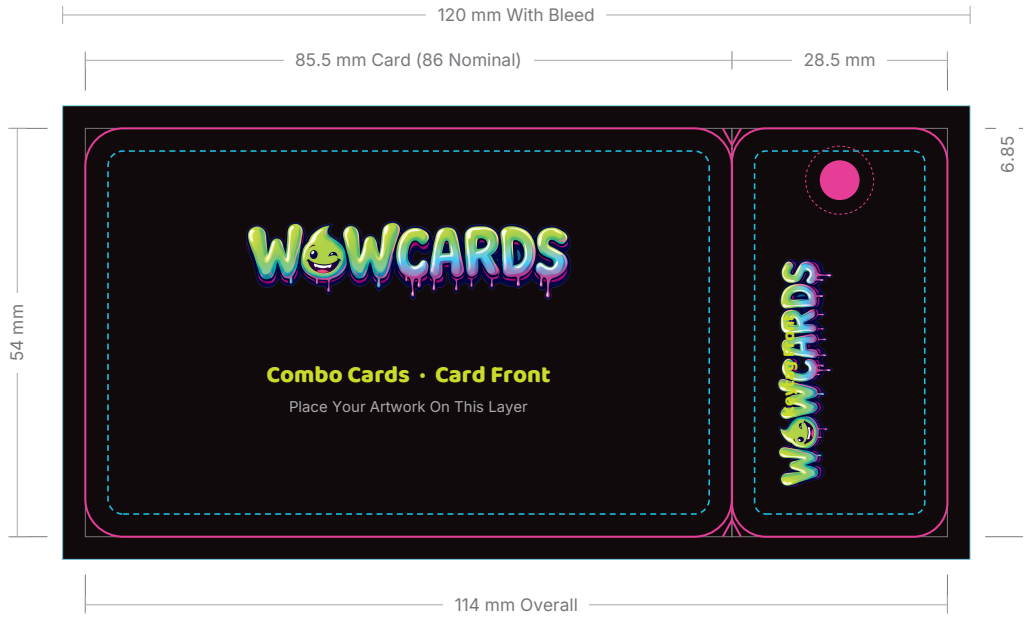

Hole Punch Ø 5 mm on the Keytag, centred across it, 6.85 mm from the top edge. Keep artwork 2 mm clear.

Guide Layers

Trim
Finished size. The card is cut here.

Bleed 3 mm
Extend backgrounds and images to this edge.

Safe Zone 3 mm
Keep all text, logos and numbers inside.

Die Line C3 M89 Y0 K0
Cutting path. Non-printing, leave on its own layer.

Hole Punch
Ø 5 mm on the Keytag, 2 mm keep-clear.

Snap Line
Where the Keytag breaks away from the card.

Setup Tips

1. Build in CMYK from the start. Rich black C20 M20 Y20 K100 for large black areas.
2. The back is a mirror of the front: the Keytag is on the left when you turn the card over.
3. Keep text, logos and numbers 3 mm inside each piece and clear of the snap line and hole.
4. Leave the bottom-right corner of the back clear for the small Wowcards imprint.
5. Barcodes are optional; if used, 100K black on a white or light panel.
6. Hide all guide layers before you export a print-ready PDF.

Combo Cards


Plastic Cards with a Keytag attached. CMYK, 300 dpi. Back shown at 100% scale. The back is mirrored: the Keytag sits on the left.

Card 85.5 × 54 mm + Keytag 28.5 × 54 mm

Die 85.5 + 28.5 × 54 mm (114 × 54)

Bleed 3 mm · Safe Zone 3 mm

Hole Punch Ø 5 mm On Keytag

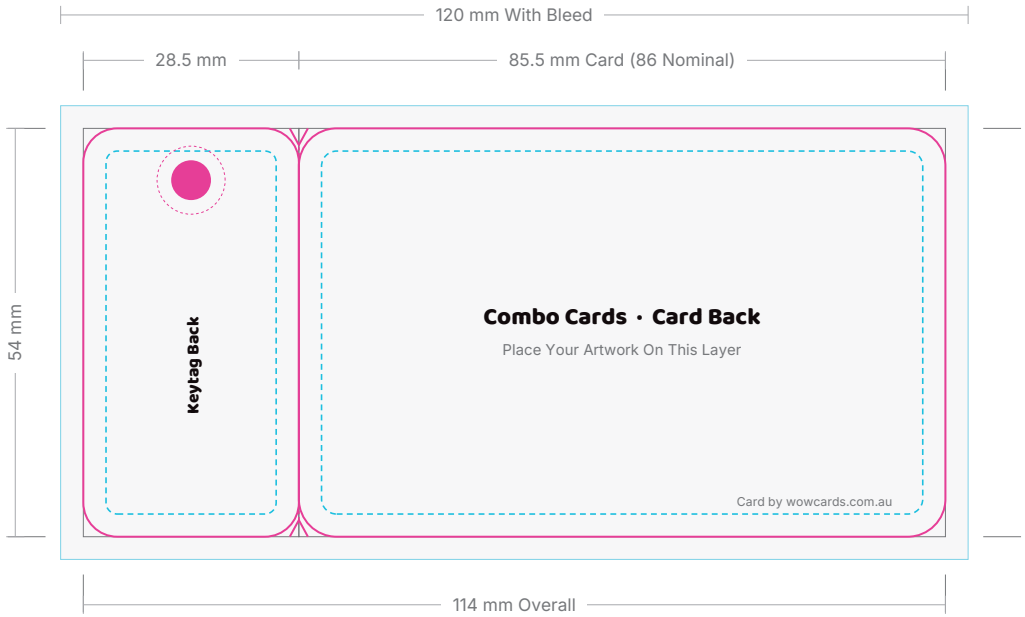

Hole Punch Ø 5 mm on the Keytag, centred across it, 6.85 mm from the top edge. Keep artwork 2 mm clear.

Guide Layers

Trim
Finished size. The card is cut here.

Bleed 3 mm
Extend backgrounds and images to this edge.

Safe Zone 3 mm
Keep all text, logos and numbers inside.

Die Line C3 M89 Y0 K0
Cutting path. Non-printing, leave on its own layer.

Hole Punch
Ø 5 mm on the Keytag, 2 mm keep-clear.

Snap Line
Where the Keytag breaks away from the card.

Setup Tips

1. Build in CMYK from the start. Rich black C20 M20 Y20 K100 for large black areas.
2. The back is a mirror of the front: the Keytag is on the left when you turn the card over.
3. Keep text, logos and numbers 3 mm inside each piece and clear of the snap line and hole.
4. Leave the bottom-right corner of the back clear for the small Wowcards imprint.
5. Barcodes are optional; if used, 100K black on a white or light panel.
6. Hide all guide layers before you export a print-ready PDF.