
Keytags · 54 × 29 mm

Landscape Keytags with a punched hole on the left. Front on top, back underneath, at 100% scale.


Trim 54 × 29 mm Landscape | Bleed 3 mm · Artboard 60 × 35 mm | Safe Zone 3 mm | Hole Ø 5 mm, 6 mm From Left Edge | CMYK · 300 dpi

FRONT

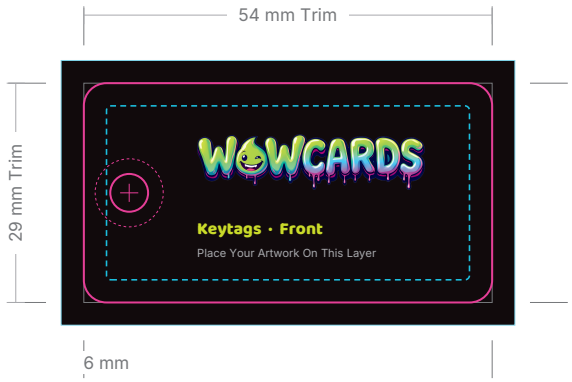

Hole centred vertically, 6 mm from the edge. Keep artwork 2 mm clear of the hole.

BACK

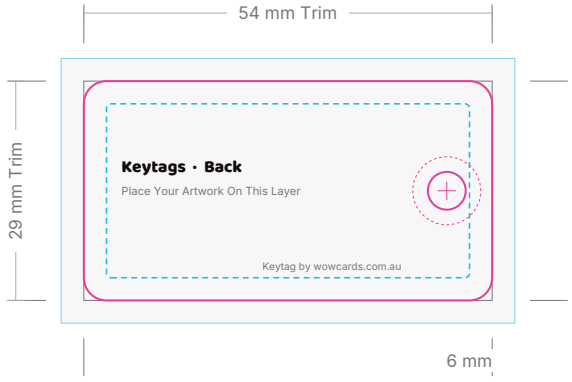

Hole centred vertically, 6 mm from the edge. The back is mirrored, so the hole sits on the right.

Guide Layers


- Trim
- Die Line C3 M89 Y0 K0
- Bleed 3 mm
- Hole Position
- Safe Zone 3 mm

Front on top, back underneath, both at 100%. Pages 2 and 3 are the single-side artboards for print-ready files. Guides do not print.

Keytags · 54 × 29 mm

Landscape Keytags with a punched hole on the left. Front shown at 100% scale.

Trim 54 × 29 mm Landscape | Bleed 3 mm · Artboard 60 × 35 mm | Safe Zone 3 mm | Hole Ø 5 mm, 6 mm From Left Edge | CMYK · 300 dpi

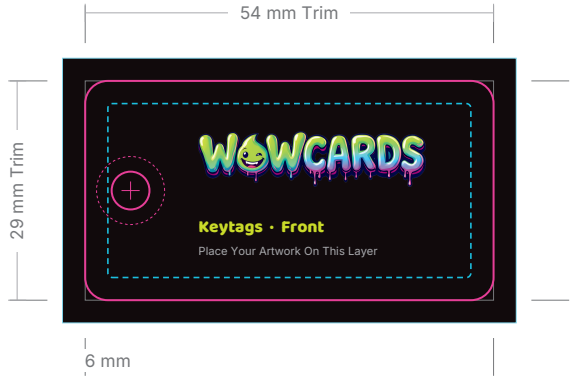

Hole centred vertically, 6 mm from the edge. Keep artwork 2 mm clear of the hole.

Guide Layers

Trim
Finished size. The card is cut here.

Bleed 3 mm
Extend backgrounds and images to this edge.

Safe Zone 3 mm
Keep all text, logos and numbers inside.

Die Line C3 M89 Y0 K0
Cutting path. Non-printing, leave on its own layer.

Hole Position
Ø 5 mm punch with a 2 mm keep-clear ring.


Setup Tips

1. Build in CMYK from the start. Rich black C20 M20 Y20 K100 for large black areas.
2. Keytags are always 54 × 29 mm landscape.
3. Extend backgrounds into the 3 mm bleed.
4. Keep text, logos and numbers inside the safe zone and clear of the hole ring.
5. Barcodes: 100K black on a white or light panel only. See the Wowcards Barcode Guide.
6. Hide all guide layers before you export a print-ready PDF.

Keytags · 54 × 29 mm

Landscape Keytags with a punched hole on the left. Back shown at 100% scale.

Trim 54 × 29 mm Landscape | Bleed 3 mm · Artboard 60 × 35 mm | Safe Zone 3 mm | Hole Ø 5 mm, 6 mm From Left Edge | CMYK · 300 dpi

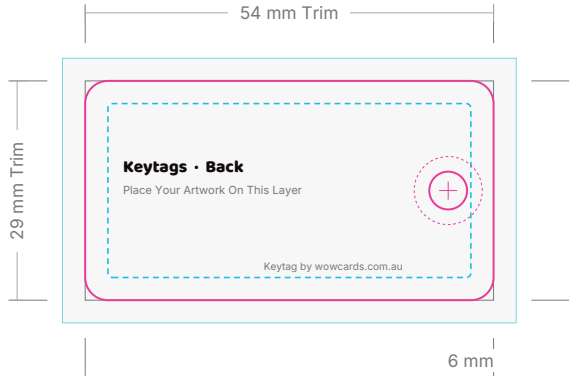

Hole centred vertically, 6 mm from the edge. The back is mirrored, so the hole sits on the right.

Guide Layers

Trim
Finished size. The card is cut here.

Bleed 3 mm
Extend backgrounds and images to this edge.

Safe Zone 3 mm
Keep all text, logos and numbers inside.

Die Line C3 M89 Y0 K0
Cutting path. Non-printing, leave on its own layer.

Hole Position
Ø 5 mm punch with a 2 mm keep-clear ring.

Setup Tips

1. Build in CMYK from the start. Rich black C20 M20 Y20 K100 for large black areas.
2. Keytags are always 54 × 29 mm landscape.
3. Extend backgrounds into the 3 mm bleed.
4. Keep text, logos and numbers inside the safe zone and clear of the hole ring.
5. Barcodes: 100K black on a white or light panel only. See the Wowcards Barcode Guide.
6. Hide all guide layers before you export a print-ready PDF.