
Plastic Cards · CR80


Standard credit card size Plastic Cards. Front on top, back underneath, at 100% scale.

Trim 85.6 × 54 mm | Bleed 3 mm · Artboard 91.6 × 60 mm | Safe Zone 3 mm | Corner Radius 3.18 mm | CMYK · 300 dpi

FRONT

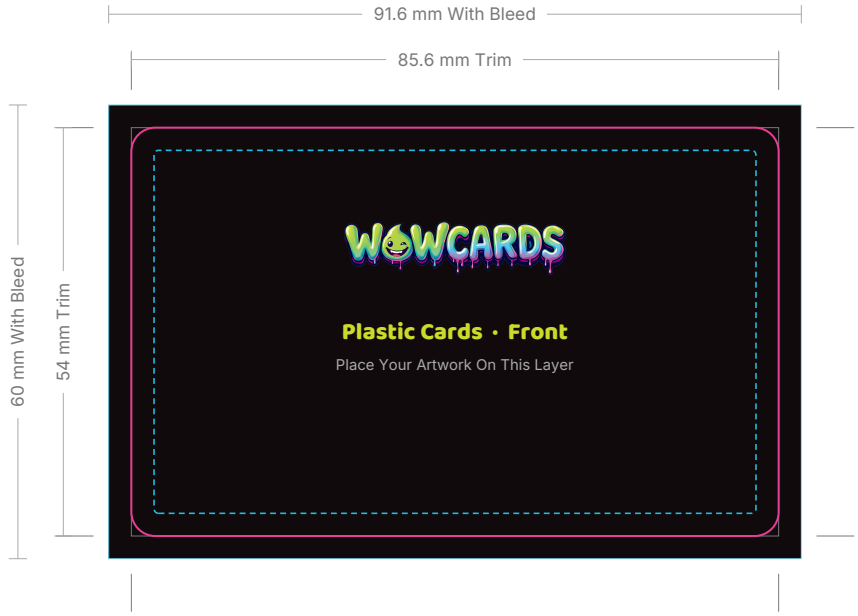

BACK

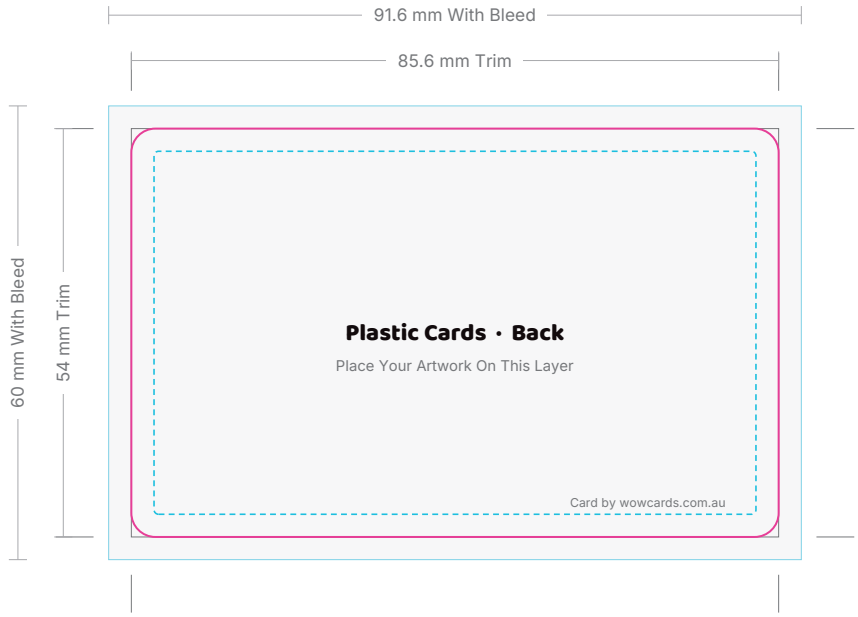

Guide Layers


- Trim
- Bleed 3 mm
- Safe Zone 3 mm
- Die Line C3 M89 Y0 K0

Front on top, back underneath, both at 100%. Pages 2 and 3 are the single-side artboards for print-ready files. Guides do not print.

Plastic Cards · CR80

Standard credit card size Plastic Cards. Front of card shown at 100% scale.

Trim 85.6 × 54 mm | Bleed 3 mm · Artboard 91.6 × 60 mm | Safe Zone 3 mm | Corner Radius 3.18 mm | CMYK · 300 dpi

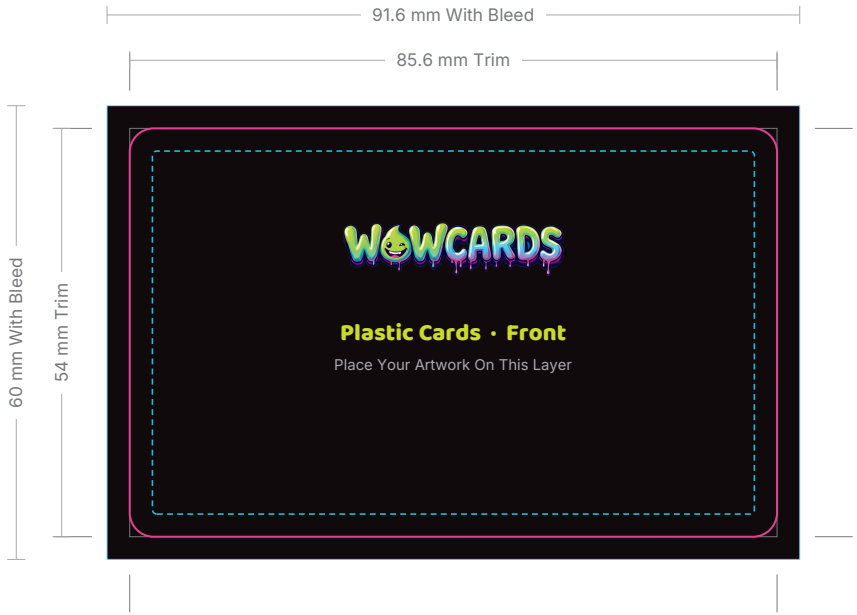

Guide Layers

Trim
Finished size. The card is cut here.

Bleed 3 mm
Extend backgrounds and images to this edge.

Safe Zone 3 mm
Keep all text, logos and numbers inside.

Die Line C3 M89 Y0 K0
Cutting path. Non-printing, leave on its own layer.


Setup Tips

1. Build in CMYK from the start. Use rich black C20 M20 Y20 K100 for large black areas; 100K for small text and barcodes.
2. Extend backgrounds into the 3 mm bleed on every edge.
3. Keep text, logos, numbers and signature panels inside the safe zone.
4. Images at 300 dpi at 100% size. Outline or embed all fonts.
5. Leave the die line on its own layer and do not print it. Hide all guide layers before you export.
6. Supply a print-ready PDF (front and back as separate pages) with a CMYK preview JPG.
7. Leave the bottom-right corner of the back clear for the small Wowcards imprint.

Plastic Cards · CR80

Standard credit card size Plastic Cards. Back of card shown at 100% scale.

Trim 85.6 × 54 mm | Bleed 3 mm · Artboard 91.6 × 60 mm | Safe Zone 3 mm | Corner Radius 3.18 mm | CMYK · 300 dpi

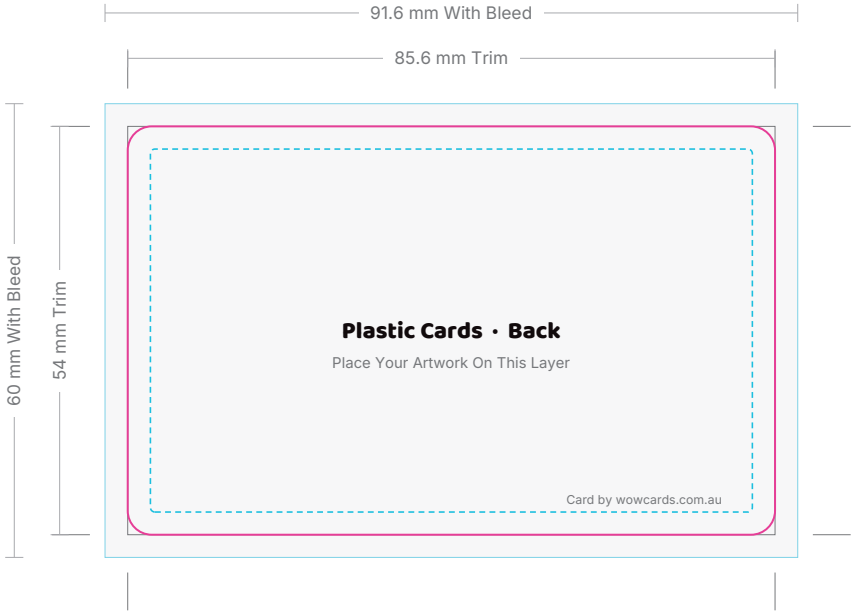

Guide Layers

Trim
Finished size. The card is cut here.

Bleed 3 mm
Extend backgrounds and images to this edge.

Safe Zone 3 mm
Keep all text, logos and numbers inside.

Die Line C3 M89 Y0 K0
Cutting path. Non-printing, leave on its own layer.

Setup Tips

1. Build in CMYK from the start. Use rich black C20 M20 Y20 K100 for large black areas; 100K for small text and barcodes.
2. Extend backgrounds into the 3 mm bleed on every edge.
3. Keep text, logos, numbers and signature panels inside the safe zone.
4. Images at 300 dpi at 100% size. Outline or embed all fonts.
5. Leave the die line on its own layer and do not print it. Hide all guide layers before you export.
6. Supply a print-ready PDF (front and back as separate pages) with a CMYK preview JPG.
7. Leave the bottom-right corner of the back clear for the small Wowcards imprint.